## TECHNICAL SPECIFICATIONS

### DEFENSIVE BARRIERS

# PROM1 UNIT


UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL1 (Beige)	4'6" (1.37m)	3'6" (1.06m)	32'9'' (10m)	5680-99-835-7866
MIL1 (Green)	4'6'' (1.37m)	3'6'' (1.06m)	32'9'' (10m)	5680-99-001-9396

A geotextile-lined unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.

#### GENERAL SPECIFICATIONS

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

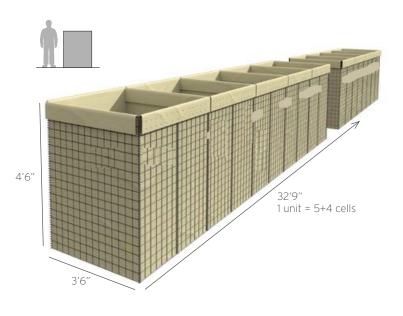

#### PACKAGING AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS						
	HEIGHT	WIDTH	LENGTH	WEIGHT		
	10'' (0.25m)	3'10'' (1.17m)	4'6" (1.37m)	329 lb (149kg)		

#### PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
7 units	7'4''	3'9''	4'7''	2,387 lb
	(2.24m)	(1.14m)	(1.40m)	(1,083kg)

#### TRANSPORT INFORMATION

ТҮРЕ	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	18	126	4,133' (1,260m)
20' Container	8	56	1,837' (560m)
40' Container	16	112	3,674' (1,120m)

