TECHNICAL SPECIFICATIONS

DEFENSIVE BARRIERS

PROM10 UNIT


UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL10	7'3"	5'	100'	5680-99-391-0852
(Beige)	(2.21m)	(1.52m)	(30.5m)	
MIL10	7'3"	5'	100'	5680-99-770-0326
(Green)	(2.21m)	(1.52m)	(30.5m)	

A geotextile-lined unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.

GENERAL SPECIFICATIONS

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, nonwoven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

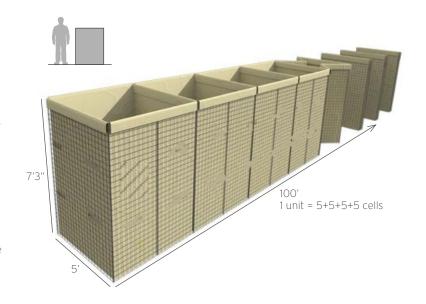

PACKAGING AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS

HEIGHT	WIDTH	LENGTH	WEIGHT	
2'4"	5′5″	7'4"	2,288 lb	
(0.71m)	(1.65m)	(2.24m)	(1,040kg)	

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
1 units	2'04"	5'4"	7'6"	2,363 lb
	(0.87m)	(1.62m)	(2.30m)	(1,074kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	20	20	2,000' (610m)
20' Container	6	6	600' (183m)
40' Container	14	14	1,400' (427m)

