

TECHNICAL SPECIFICATIONS

DEFENSIVE BARRIERS

PROM12 UNIT


UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL12 (Beige)	7' (2.13m)	3'6" (1.06m)	108' (33m)	5680-99-974-8891
MIL12 (Green)	7' (2.13m)	3'6" (1.06m)	108' (33m)	5680-99-153-1977

A geotextile-lined unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.

GENERAL SPECIFICATIONS

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

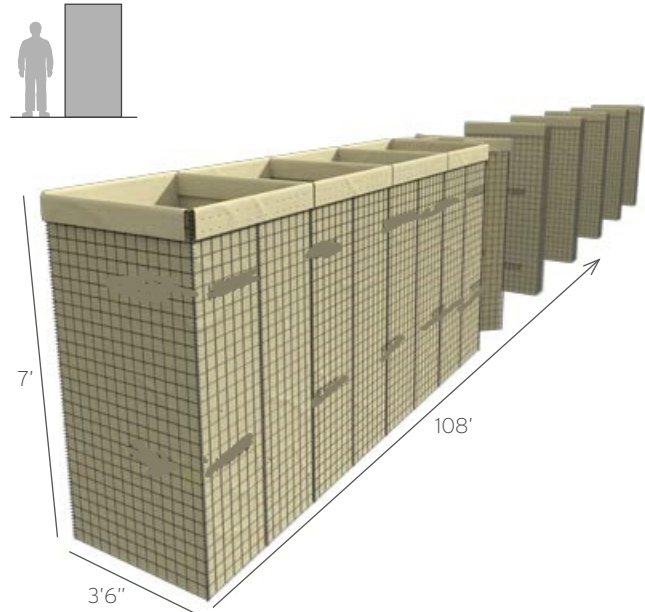

PACKAGING AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS

HEIGHT	WIDTH	LENGTH	WEIGHT
2'1" (0.64m)	7'8" (2.34m)	7'7" (2.32m)	1,793 lb (813kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
1 units	2'8" (0.80m)	7'8" (2.34m)	7'7" (2.32m)	1,894 lb (859kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	18	18	1,948' (594m)
20' Container	6	6	650' (198m)
40' Container	15	15	1,624' (495m)

