TECHNICAL SPECIFICATIONS

DEFENSIVE BARRIERS

PROM4 UNIT


UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL4	3'3"	5'	32'9"	5680-99-001-9393
(Beige)	(1.00m)	(1.52m)	(10m)	
MIL4	3'3"	5'	32'9"	5680-99-001-9399
(Green)	(1.00m)	(1.52m)	(10m)	

A geotextile-lined unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.

GENERAL SPECIFICATIONS

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

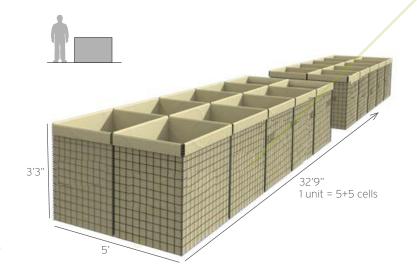

PACKAGING AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS

HEIGHT	WIDTH	LENGTH	WEIGHT
1'4"	5'3"	3'3"	341 lb
(0.40m)	(1.60m)	(1.00m)	(155kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
8 units	6'	3'7"	8'9"	2,976 lb
	(1.83m)	(1.10m)	(2.67m)	(1,350kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	10	80	2,624' (800m)
20' Container	4	32	1,050' (320m)
40' Container	8	64	2,100' (640m)

