

TECHNICAL SPECIFICATIONS

DEFENSIVE BARRIERS

PROM6 UNIT


UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL6 (Beige)	5'6" (1.68m)	2' (0.61m)	10' (3.05m)	5680-99-0019395
MIL6 (Green)	5'6" (1.68m)	2' (0.61m)	10' (3.05m)	5680-99-001-9401

A geotextile-lined unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.

GENERAL SPECIFICATIONS

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

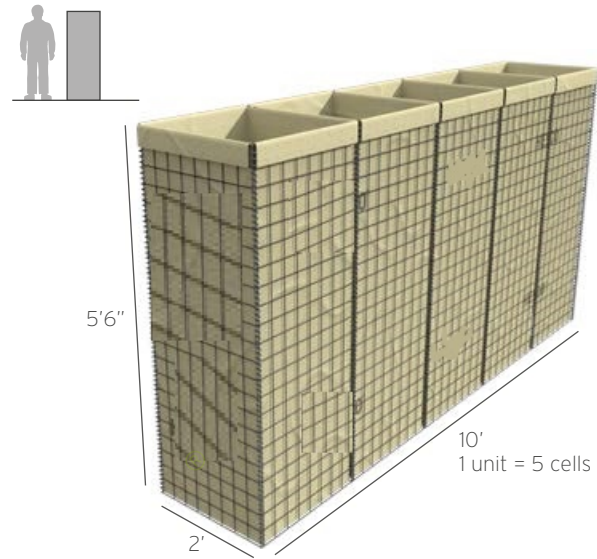

PACKAGING AND TRANSPORT INFORMATION

FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS

HEIGHT	WIDTH	LENGTH	WEIGHT
9" (0.25m)	2' (0.61m)	5'6" (1.68m)	146 lb (66kg)

PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
27 units	4'11" (1.25m)	5'9" (1.75m)	7'5" (2.25m)	4,023 lb (1,875kg)

TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	18	486	4,863' (1,482m)
20' Container	6	162	1,621' (494m)
40' Container	12	324	3,242' (988m)

