

## TECHNICAL SPECIFICATIONS

### DEFENSIVE BARRIERS

# PROM9 UNIT


UNIT	HEIGHT	WIDTH	LENGTH	NSN
MIL9 (Beige)	3'3" (1.00m)	2'6" (0.76m)	30' (9.14m)	5680-99-563-5949
MIL9 (Green)	3'3" (1.00m)	2'6" (0.76m)	30' (9.14m)	5680-99-052-0506

A geotextile-lined unit for general use as an earth-filled barrier. The units are suitable for filling with earth, sand, gravel, crushed rock and other granular materials. The unit fulfills a wide range of uses, including the construction of protective walls and barriers.

#### GENERAL SPECIFICATIONS

Geotextile-lined welded mesh barrier coated to ASTM A 856. All wires conform to BS EN 10218-2:2012. Zinc-Aluminum coatings are to BS EN 10244-2:2009, where appropriate. The geotextile is a heavy-duty, non-woven, permeable, polypropylene fabric, available in either beige or green color.

All dimensions and weights are nominal. Diagrams and product images are for illustrative purposes only.

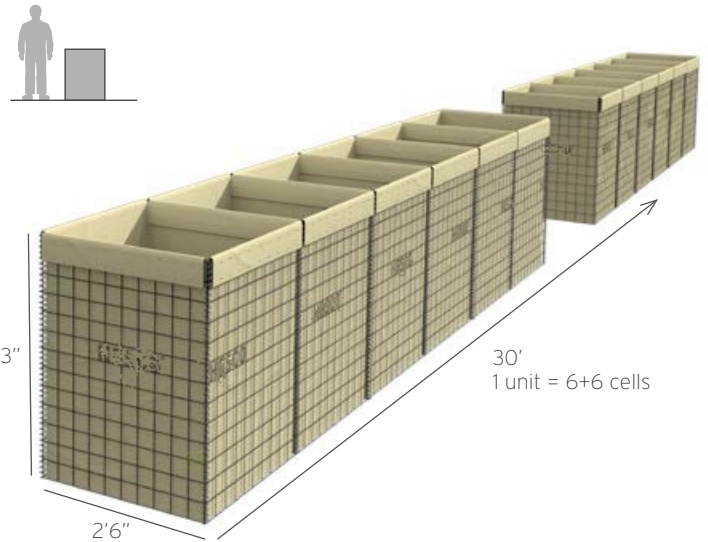

## PACKAGING AND TRANSPORT INFORMATION

### FLAT-PACKED INDIVIDUAL UNIT DIMENSIONS & WEIGHTS

HEIGHT	WIDTH	LENGTH	WEIGHT
1'1" (0.33m)	3' (0.91m)	3'3" (1.00m)	222 lb (101kg)

### PALLET INFORMATION

PER PALLET	HEIGHT	WIDTH	LENGTH	WEIGHT
7 units	6' (1.83m)	3'7" (1.09m)	3'3" (1.00m)	1,607 lb (729kg)

### TRANSPORT INFORMATION

TYPE	PALLETS	UNITS	DEPLOYED LENGTH
13.5 Trailer	24	168	5,037' (1,535m)
20' Container	10	70	2,100' (640m)
40' Container	20	140	4,198' (1,280m)

